


FANS

CRDV 200R - 315R



Inline duct fan in plastic
Direct drive

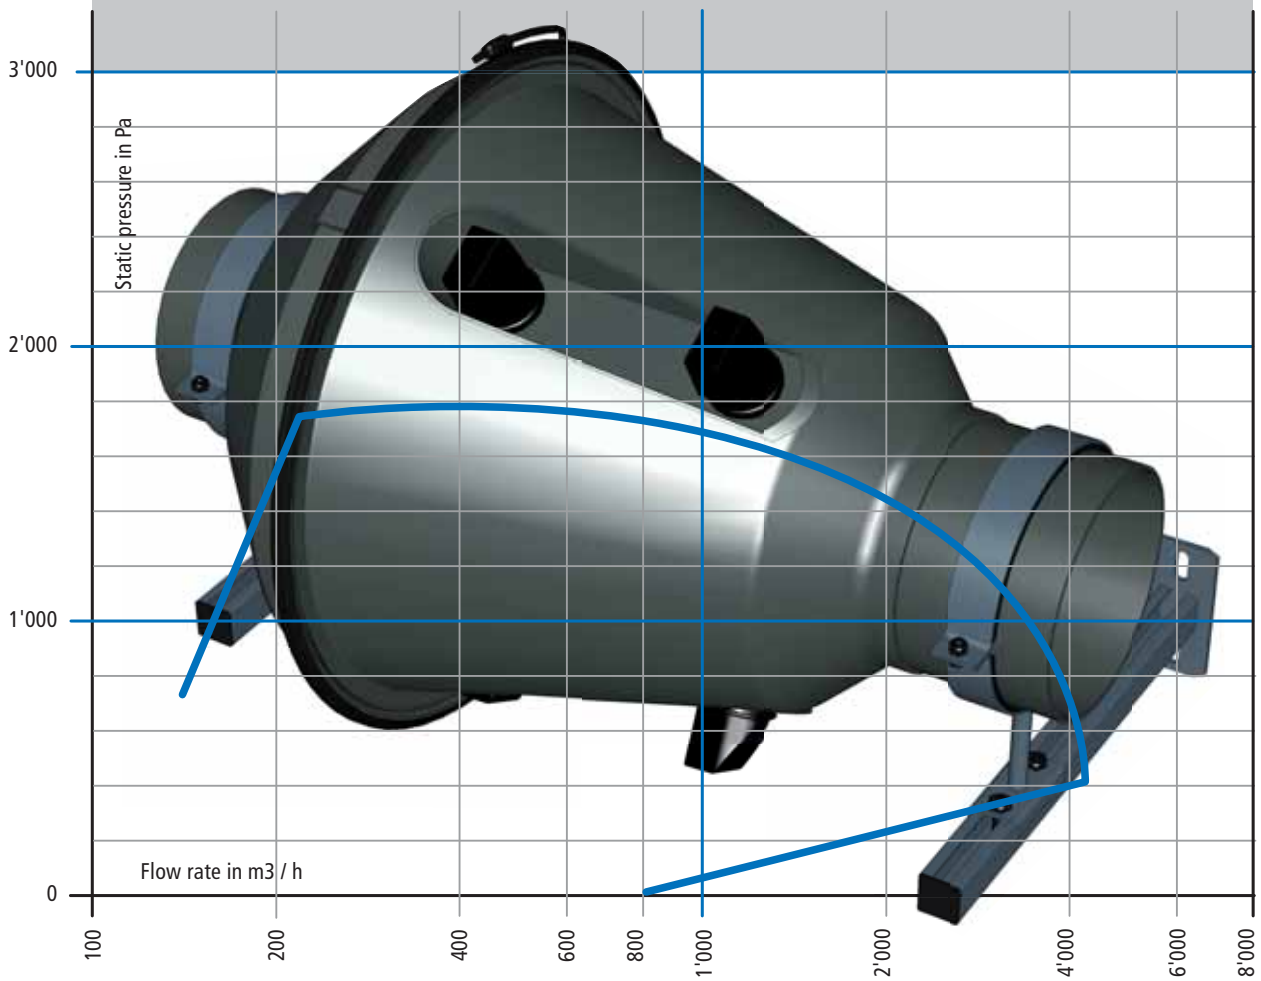

www.colasit.com

Performance

Flow rate: min. 340 m³/h to max. 5'600 m³/h
 Static pressure: min. 50 Pa to max. 1'700 Pa
 Efficiency: max. 40 %
 Connection-Ø: 200, 250, 315mm

Housing

- Solid design
- Thermoformed
- Machined
- Available in: PPs, PPs-el

Impeller

- Injection-moulded
- 20 forward-curved blades
- Torque transmission achieved by corrosion resistant aluminium hub
- Adaptor for easy impeller mounting
- Available in: PPs, PPs-el

Drive

- Direct drive: - Impeller is mounted directly to the motor shaft
- Motor: - Three phase motor
 - one / multi-stage
 - Flange mounting motor for direct drive
 - Motor no contact with waste air

EX-Protection



Execution in ATEX. Available for zone 1 + 2

Accessories

- PVC sleeve with fixing bands, stainless
- Ceiling / Floor / Wall fastening
- Service switch
- Frequency converter IP 66 / IP 54 / IP 20

Dimensions

